

CW-10A



Ingress protection



Drop Resistance 1,2m



Tumble Test



Hot Swap Battery



Barcode Reader



NFC

**ASSEMBLY & SERVICES IN FRANCE**

USED IN THE FIELD, VEHICLE, AND IN THE OFFICE

- Processor Rockchip RK3399 (4 ARM Cortex-A53 + 2 ARM Cortex-A72)
- Android 12
- Tested to MIL STD 810G, drop resistance 1.2m
- IP65, Tumble test 500 times 1m
- Hot swap Battery 10800mAh
- Hardware Encryption TPM 2.0
- LAN Ethernet 10/100/1000 (PXE support)
- Handstrap (standard)
- Briefcase handle and stylus



Office dock

AVAILABLE OPTIONS

- Briefcase handle and stylus
- 4G LTE multi carrier with GPS
- Barcode reader 2D (Honeywell)
- Mobile dock, office dock and battery charger
- NFC




Battery charger



Mobile dock



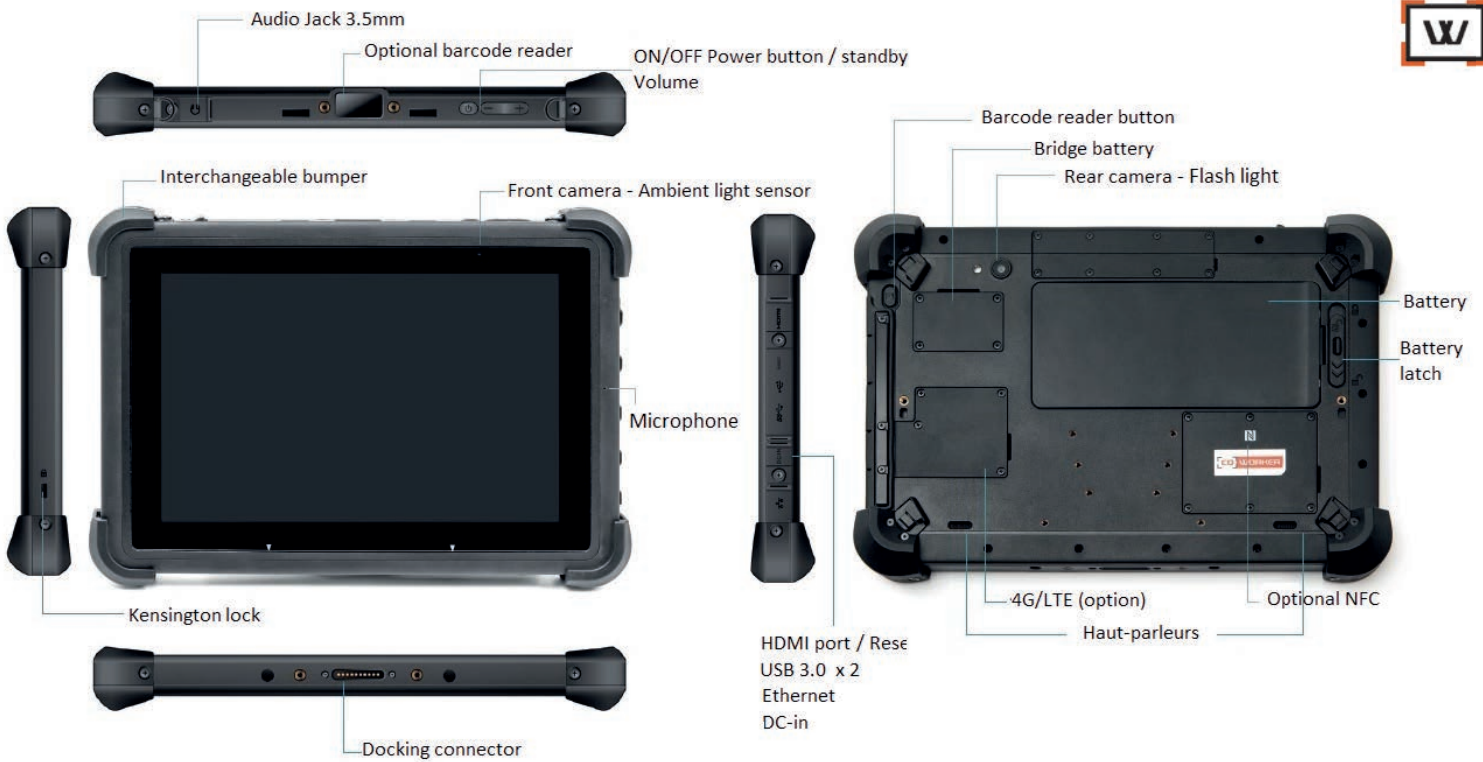

SOFTWARE	Android 12
DURABILITY	MIL-STD-810G (multiple drops 1.2 m) 26 times all corners and sides with single tablet while operating IP65 Tumble test 500 times x 1m Screen protection
CPU	Rockchip RK3399
RAM	4GB
STORAGE	64GB
DISPLAY	10" WUXGA 1920 x 1200 IPS 550 nits (Typ)
AUDIO	1 digital microphone 2 integrated speakers
ENTRY	10 points multi-touch and capacitive stylus, support glove mode and wet touch mode
INTERFACE	Docking connector USB 3.0 Port Micro USB 2.0 Port RJ45 10/100/1000 Ethernet Port Micro HDMI Audio Jack 3.5mm SIM card location Micro SDXC Card reader
STATUS INDICATORS	On/Off, battery status
CAMERA	2MP front camera 8MP rear camera, auto focus, flash

WIRELESS	4G LTE optional Built-in GPS Ublox M8 Wi-Fi 802.11a/b/g/n/ AC Bluetooth® 4.2
POWER SUPPLY	Hot-swappable battery 3.7V, 10800 mAh, 40Wh Battery Autonomy : up to 8.5 hours
SECURITY	Chipset TPM 2.0 Optional NFC Kensington cable lock slot
SENSORS	Optional 1D/2D barcode reader 9 Axis MEMS sensor (accelerometer, compass, gyroscope) Ambient Light Sensor Proximity Sensor
DIMENSIONS	283.4mm x 192mm x 21.9mm
WEIGHT	1.28 kg
ACCESSORIES	Handstrap with stylus holder Mobile Dock Office dock Battery charger AC adapter 65W (19V / 3.42A) Vehicle charger Snap Mount System
TEMPERATURE	Operating temperature -20°C to 50°C Storage temperature -30°C to 60°C