

CW-8A



Ingress protection



1.2m Drop Resistance



Tumble Test



Hot Swap Battery



Barcode Reader



NFC



Video

ASSEMBLY & SERVICES IN FRANCE

USED IN THE FIELD, VEHICLE, AND IN THE OFFICE

- Processor Rockchip RK3399 (4 ARM Cortex-A53 + 2 ARM Cortex-A72)
- Android 9 GMS
- Tested to MIL STD 810G, drop resistance 1.2m
- IP65, Tumble test 1000 times 1m
- Hot swap Battery 11850mAh
- Handstrap (standard)



Office dock

AVAILABLE OPTIONS


- Briefcase handle and stylus
- NFC
- 4G LTE multi carrier with GPS
- Barcode reader 2D (Honeywell)
- Mobile dock, office dock and battery charger




Battery charger



Mobile dock

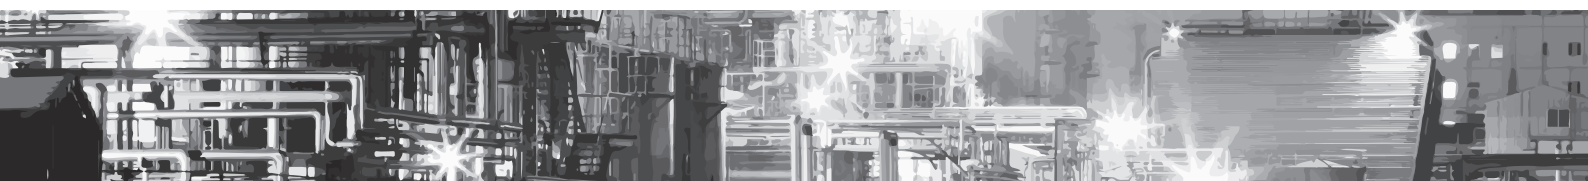

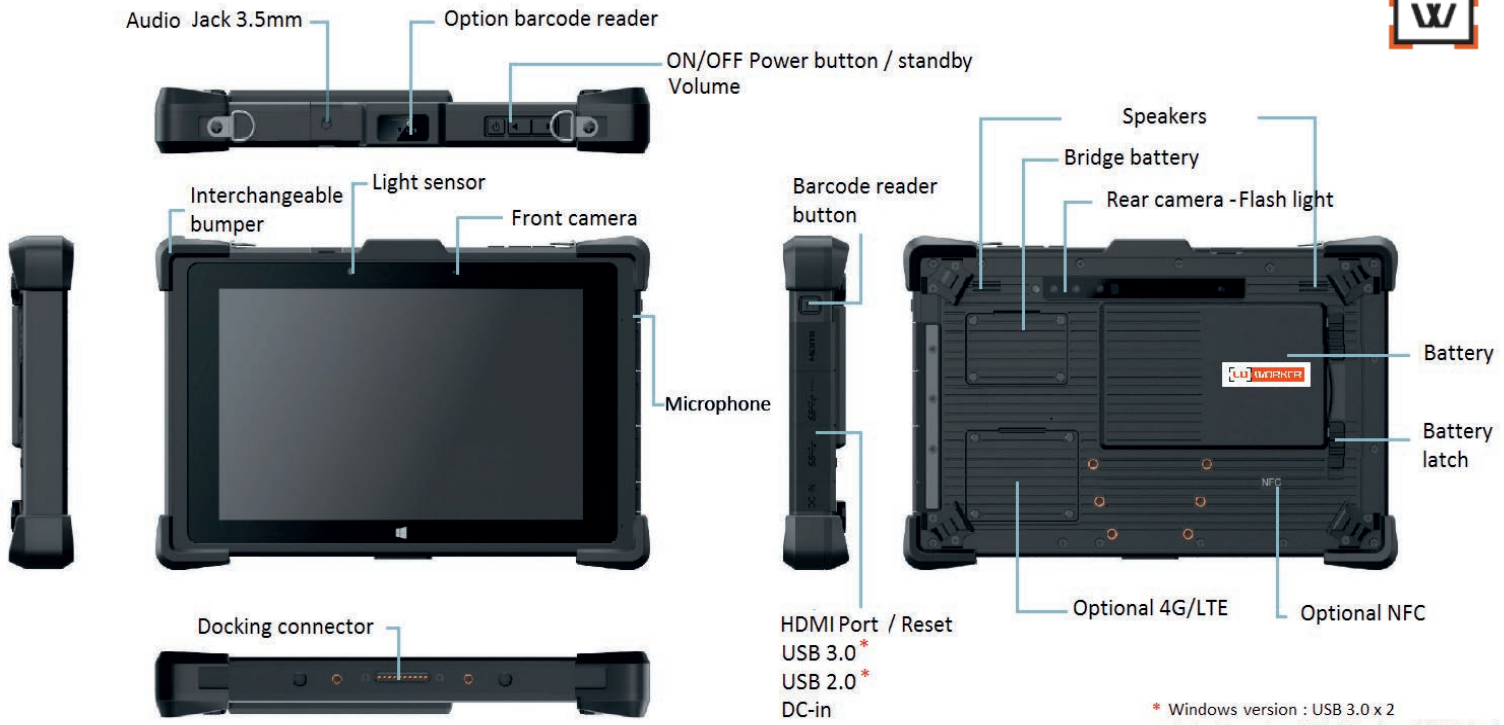

PRODUCT SPECIFICATIONS

SOFTWARE	Android 9 GMS	WIRELESS	4G LTE optional Built-in GPS Ublox M8 Wi-Fi 802.11a/b/g/n/ AC Bluetooth® 4.2
DURABILITY	MIL-STD-810G (multiple drops 1.2 m) 26 times all corners and sides with single tablet while operating IP65 Tumble test 1000 times x 1m Screen protection	POWER SUPPLY	Hot-swappable battery 3.7V, 11850 mAh, 43,8Wh Battery Autonomy : up to 10 hours
CPU	Rockchip RK3399 (4 Cortex-A53 + 2 Cortex-A72)	SECURITY	Optional NFC
RAM	4GB	SENSORS	Optional 1D/2D barcode reader 9 Axis MEMS sensor (accelerometer, compass, gyroscope) Ambient Light Sensor Proximity Sensor
STORAGE	64GB	DIMENSIONS	232.6mm x 150mm x 22mm
DISPLAY	8" - 800 x 1280 IPS 470 nits (Typ)	WEIGHT	0,850 Kg
AUDIO	1 digital microphone 2 integrated speakers	ACCESSORIES	Replacement handstrap Mobile Dock Office dock Battery charger AC adapter 65W (19V / 3.42A) USB/RJ45 10/100/1000 adapter Vehicle charger Snap Mount System
ENTRY	10 points multi-touch and capacitive stylus, support glove mode and wet touch mode	TEMPERATURE	Operating temperature -20°C to 50°C Storage temperature -30°C to 60°C
INTERFACE	Docking connector USB 3.0 Port USB 2.0 Port Micro HDMI Audio Jack 3.5mm SIM card location Micro SDXC Card reader		
CAMERA	2MP front camera 8MP rear camera, auto focus, flash		

